



AU-120MHB-M6

POWER RANGE

360W~380W


CELL SIZE

166*83mm

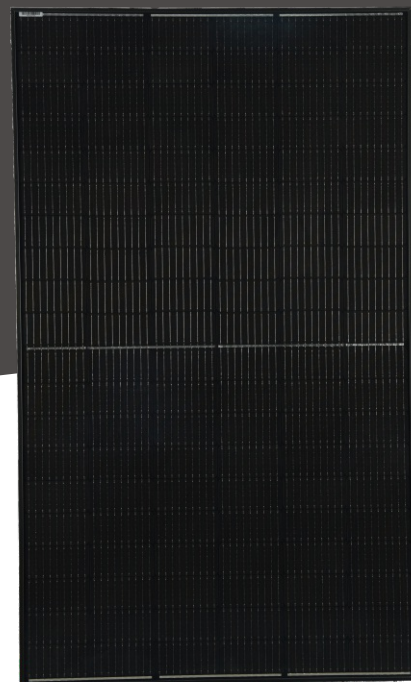

JUNCTION BOX

Waterproof protection grade: IP67/IP68
Safety Level: Class II
Maximum System Voltage: 1500V
outstanding waterproof level ·
Effectively resist harsh environments



Frame

Strong mechanical load
resistance up to 5400Pa
Anodic oxidation layer resistant to
chemical corrosion available
in silver and black




9BB

QUALIFICATIONS AND CERTIFICATES



· IEC61215 / · IEC61730

WARRANTY

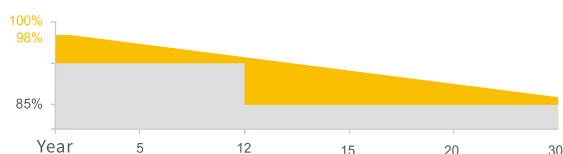

12
YEARS

Guarantee on product material and workmanship

30
YEARS

Linear Power output warranty



Half-cut Technology

New circuit design, lower internal current and
lower internal resistance loss



Significantly avoiding heat spot

The unique circuit design to reduce the temperature
of heat spot significantly, so that to reduce the power loss
and then increase the output of modules.



Lower cost

Increasing power generation can reduce the
cost per kilowatt-hour



Excellent performance of PID resistance

The performance of PID resistance (Potential Induced
Degradation) passed the standard of TUV Nord.


AUSTA ENERGY
www.austagroup.com

AUSTA ENERGY established in 2008, is a high-tech enterprise integrating R&D, production and sales of solar energy products. It is committed to the overall solution of distributed photovoltaic system and provides services from consulting, design, construction, financing to intelligent operation and maintenance.

AUSTA has 3 production sites in China and branches and representative offices in more than 10 countries overseas. Products include solar cells, modules, On/Off grid solar system, solar pump and other solar related applications. Our products have passed many international certifications such as TUV, MCS, CEC, IEC, ISO, CE, CQC and so on. With excellent quality, our products are exported to more than 100 countries of the world.

Since its establishment, AUSTA has always followed the idea of "Smart energy, Lightening future". It has followed the steps of "the Belt and Road Initiative", we bring bright light to the countries and people who are short of electricity. Sharing the concept of modern civilization, and building a green home together.

PV DRAWINGS

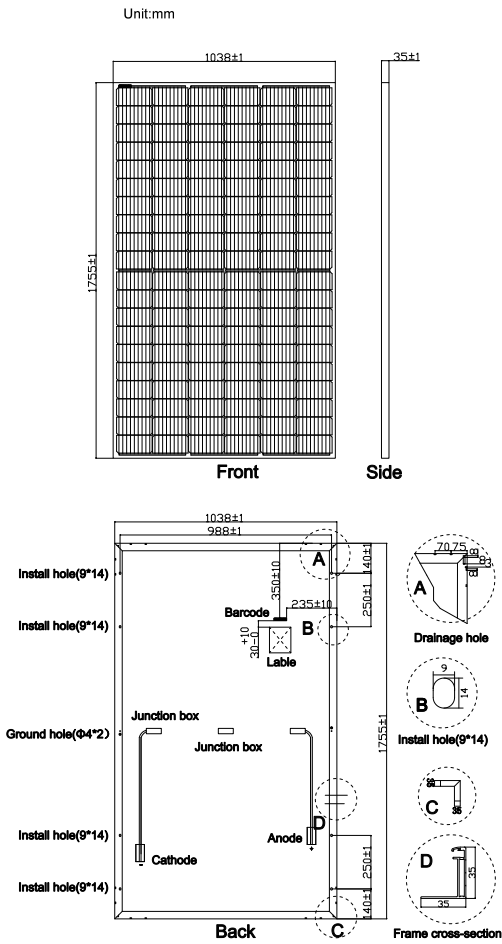

ELECTRICAL DATA (STC)

Model Type	AU360-30V -MHB	AU365-30V -MHB	AU370-30V -MHB	AU375-30V -MHB	AU380-30V -MHB
Peak Power(Pmax)	360.00	365.00	370.00	375.00	380.00
Maximum Power Voltage(Vmp)	34.00	34.20	34.40	34.60	34.80
Maximum Power Current(Imp)	10.59	10.68	10.76	10.84	10.92
Open Circuit Voltage(Voc)	40.50±3%	40.80±3%	40.90±3%	41.10±3%	41.30±3%
Short Circuit Current(Isc)	11.35±3%	11.43±3%	11.52±3%	11.60±3%	11.69±3%
Module Efficiency(%)	19.76	20.03	20.31	20.58	20.85

* STC: irradiance 1000 W/m², AM 1.5, and cell temperature of 25°C

ELECTRICAL DATA (NOCT)


Model Type	AU360-30V -MHB	AU365-30V -MHB	AU370-30V -MHB	AU375-30V -MHB	AU380-30V -MHB
Peak Power(Pmax)	268.80	272.60	276.30	280.00	283.80
Maximum Power Voltage(Vmp)	31.70	31.80	32.00	32.20	32.40
Maximum Power Current(Imp)	8.49	8.56	8.63	8.69	8.76
Open Circuit Voltage(Voc)	38.00±3%	38.20±3%	38.30±3%	38.50±3%	38.70±3%
Short Circuit Current(Isc)	9.17±3%	9.25±3%	9.32±3%	9.38±3%	9.45±3%

* NOCT: irradiance 800 W/m², AM 1.5, ambient temperature 20°C, wind speed 1 m/s

TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500 V
Maximum Series Fuse Rating (A)	20 A
Power Tolerance	0~+3 W
Pmax Temperature Coefficients (W/°C)	-0.350 %/°C
Voc Temperature Coefficients (V/°C)	-0.270 %/°C
Isc Temperature Coefficients (A/°C)	+0.048 %/°C
NOCT Nominal Operating Cell Temperature (°C)	45±2 °C
Operating and Storage Temperature (°C)	-40~+85 °C

IV CURVE (370W)

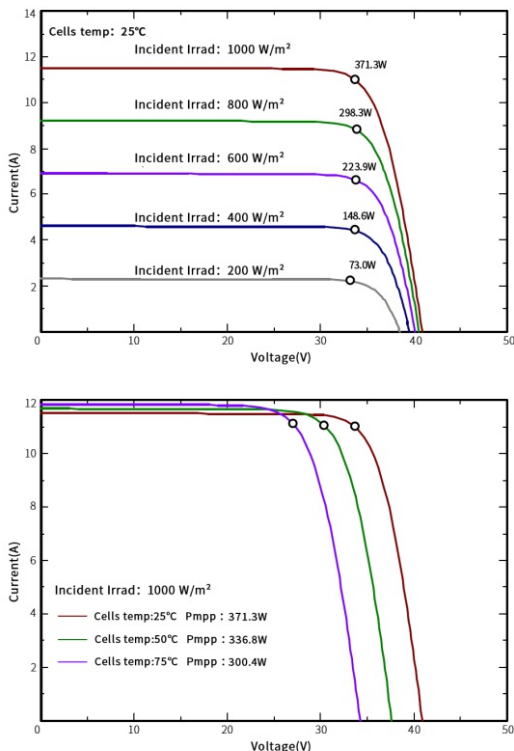

MECHANICAL CHARACTERISTICS

Cell Type	166*83 Black Mono
No. of Cells	120 (12*10)
Dimensions	1755*1038*35mm
Weight	19.50kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP67/IP68 3diodes
Output cables	4mm ² cable 35cm (Including MC4 connector)
MaxWind Load/Snow Load	2400Pa/5400Pa

PACKING WAY

20FT container	6 Packages/186pcs
40HQ container	26 Packages/858pcs

Austa



ZHEJIANG AUSTA GREEN ENERGY TECHNOLOGY CO., LTD

ADD: NO.128 Haichuan Rd, Jiangbei Dist., Ningbo, China

Tel : 86-574-87915068

Cell: 86-13566302808

E-mail : sales@austagroup.com

The company reserves the right of final interpretation, November 2020 edition